

REP/1

ONDERVOUWLAADKLEP / 1 CILINDER


hefvermogen: ■ 1500 kg



REP



TECHNISCHE GEGEVENS

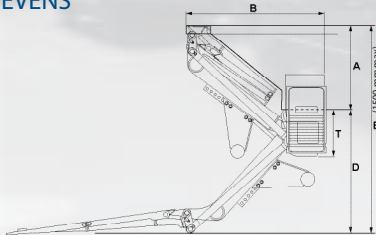

Type.	Hefvermogen (hart / hart op 600 mm)	Standaard platform Afmetingen Hoogte x Breedte	Gewicht *	A		E	B	T
				min.	max.	min.	min.	
REP 15/1	1500 Kg	1133 x 2000 mm**	310 Kg			900 mm		
		1233 x 2000 mm**	318 Kg	430 mm	700 mm	950 mm	1150 mm	250 mm
		1433 x 2000 mm**	326 Kg			1050 mm		

TOEPASSINGEN

De ondervooflift REP is een ideale laadklep voor distributievervoer voor chassis boven de 7500 kg GVW.

ALGEMENE INFORMATIE

PLATFORM

- Platform aluminium

MECHANISCHE FUNCTIES

- Handmatig openen van platform.
- Laadklep met voorgemonteerd bumper
- Smering arme lagering met chrome pennen.

HYDRAULIEK

- Anteo compact aggregaat.
- 1 cilinder.
- Slangbreukventiel.

BEDIENING

- Bedieningskast
- Geen electronica
- Massa schakelaar in bedieningskast
- Tweehand bediening dmv Joystick en draaiknop

MONTAGE

Laadklep volledig voorgemonteerd en afgetest

ONDERVOUWKLEPPEN

* weight does not include rear cross member (50 Kg - 110 lbs). - ** width up to 2500 mm (98" 3/8) available on request.

*** with 1133 mm (44" 1/2) platform.

Centre of gravity of the vehicle depending on the type of platform and the size of the installations on the vehicle (see assembly instructions). The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.